
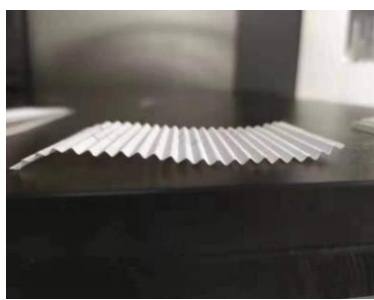



Fiberglass Filter Mat

PRODUCT DESCRIPTION

Fiberglass filter tissue is mainly used for the treatment and adsorption of natural gas, coal, oil and other combustion waste gas, as well as the filtration and adsorption of organic waste gas and air purification equipment. With the property of high strength, good resistance and easy adsorption. It is produced by wet forming technology, with good processing and forming performance, high wetting strength, not easy to break, and high production, processing efficiency, good hydrophilicity, even dipping and other advantages.



CHARACTERISTICS

- ◆ Good Forming Performance
- ◆ Fast Impregnating and Even Dipping
- ◆ Good wet strength, No Fracture During Processing

TECHNICAL DATA

Product code	Unit Weight	LOI	MD Tensile Strength	Moisture Content	Thickness	Paper core diameter
	g/m ²	%	N/5CM	%	mm	mm
F-GL25	25	10.0	≥80	≤1.0	0.25	76/152
F-GL30	30	10.0	≥120	≤1.0	0.3	76/152
F-GL40	40	10.0	≥180	≤1.0	0.3	76/152
F-GL90	90	10.0	≥355	≤1.0	0.7	76/152
Testing Basis	ISO3374	ISO 1887	ISO3342	ISO3344	ISO4603	76/152
Paper core diameter: 76/152mm						

Remark: 1. Other specification can be customized according to customer' s demand.

2. The technical data above is for reference only

PACKING

Every roll in plastic film.

Loading with Pallet will be as per roll size.

STORAGE

This product should be stored in a dry, ventilated and rainproof place, with temperatures from 5°C to 35°C and humidity between 35% and 65%. It is recommended to be kept in intact package when not used to avoid damp.

Version #: No.201911

Address: No.20 Jiangjun Ave., Nanjing, P.R. China

URL: www.fiberglassnonwoven.com

E-mail: sales@njefg.com

Tel.: 0086 25 52270147 / 58321911

Fax: 0086 25 58321442

WhatsApp: 0086 18851651909